


16-Port 10/100/1000T 802.3at PoE + 4-Port Gigabit TP/SFP Combo Managed Switch



A Perfect Managed PoE+ Switch with Advanced L2/L4 Switching and Security

PLANET GS-4210-16P4C is a cost-optimized, Gigabit PoE+ Managed Switch featuring PLANET **intelligent PoE** functions to improve the availability of critical business applications. It provides IPv6/IPv4 dual stack management and built-in L2/L4 Gigabit switching engine along with **16 10/100/1000BASE-T** ports featuring **30-watt 802.3at PoE+ and 4 additional Gigabit TP/SFP combo ports**. With a total power budget of up to **240 watts** for different kinds of PoE applications, the GS-4210-16P4C provides a quick, safe and cost-effective Power over Ethernet network solution for small businesses and enterprises.

GS-4210-16P4C

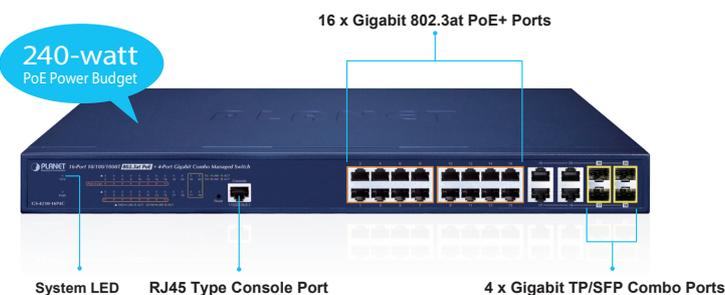

Cybersecurity Network Solution to Minimize Security Risks

The GS-4210-16P4C supports SSHv2 and TLS protocols to provide strong protection against advanced threats. It includes a range of cybersecurity features such as **DHCP Snooping**, **IP Source Guard**, **dynamic ARP Inspection** Protection, **802.1x port-based** network access control, **RADIUS** and **TACACS+** user accounts management, **SNMPv3** authentication, and so on to complement it as an all-security solution.



Physical Port

- **20-Port 10/100/1000BASE-T** Gigabit RJ45 copper with 16-Port **IEEE 802.3at/af PoE** Injector (Port-1 to Port-16)
- **4 100/1000BASE-X SFP** slots, shared with port-17 to port-20 compatible with 100BASE-FX SFP
- RJ45 console interface for switch basic management and setup
- Reset button for system factory default and reboot

Switching


- Hardware-based 10/100Mbps, half/full duplex and 1000Mbps full duplex mode, flow control and auto-negotiation, and auto MDI/MDI-X
- Features Store-and-Forward mode with wire-speed filtering and forwarding rates
- IEEE 802.3x flow control for full duplex operation and back pressure for half duplex operation
- 12K jumbo frame
- Supports ESD protection
 - Contact Discharge 6KV DC
 - Air Gap Discharge 8KV DC
- Automatic address learning and address aging
- Supports CSMA/CD protocol

Power over Ethernet

- Complies with IEEE 802.3at Power over Ethernet Plus, end-span PSE
- Backward compatible with IEEE 802.3af Power over Ethernet
- Up to 16 ports of IEEE 802.3af/802.3at devices powered
- Supports PoE power up to 30 watts for each PoE port
- 240-watt PoE budget
- Auto detects powered device (PD)
- Circuit protection prevents power interference between ports
- Remote power feeding up to 100 meters in standard mode and 250m in extend mode
- PoE management
 - Total PoE power budget control
 - Per port PoE function enable/disable
 - PoE Port Power feeding priority
 - Per PoE port power limitation
 - PoE delay
 - PD classification detection
- Intelligent PoE features
 - PD alive check
 - PoE schedule
- PoE extension

Redundant Ring, Fast Recovery for Critical Network Applications

The GS-4210-16P4C supports redundant ring technology and features strong, rapid self-recovery capability to prevent interruptions and external intrusions. It incorporates advanced **ITU-T G.8032 ERPS (Ethernet Ring Protection Switching)** technology, Spanning Tree Protocol (802.1s MSTP) into customer's network to enhance system reliability and uptime in various environments.

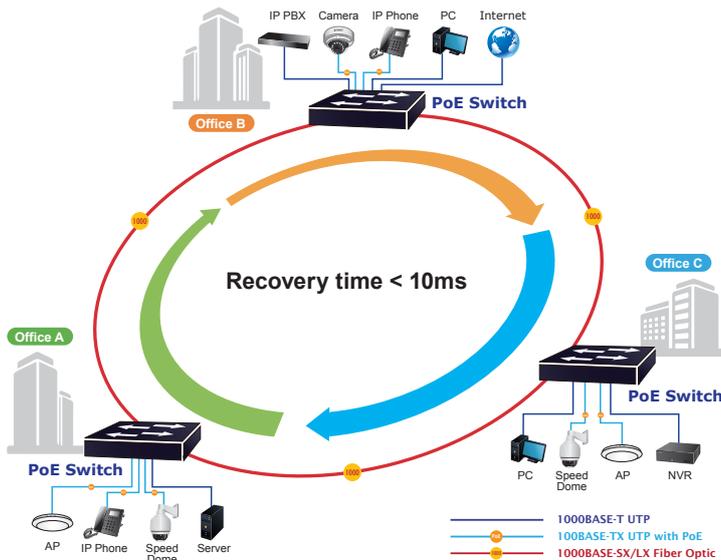

Built-in Unique PoE Functions for Powered Devices Management


As it is the managed PoE switch for surveillance, wireless and VoIP networks, the GS-4210-16P4C features the following special PoE management functions:

- PD Alive Check
- Scheduled Power Recycling
- PoE Schedule
- PoE Usage Monitoring
- PoE Extension

Intelligent Powered Device Alive Check

The GS-4210-16P4C can be configured to monitor connected PD (powered device) status in real time via ping action. Once the PD stops working and responding, the GS-4210-16P4C will resume the PoE port power and bring the PD back to work. It will greatly enhance the network reliability through the PoE port resetting the PD's power source, thus reducing the administrator's management burden.

PD Alive Check

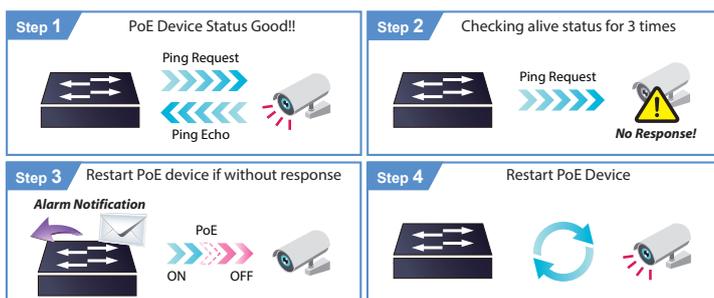

Layer 2 Features

- Prevents packet loss with back pressure (half-duplex) and IEEE 802.3x pause frame flow control (full-duplex)
- High performance Store and Forward architecture, broadcast storm control, runt/CRC filtering eliminates erroneous packets to optimize the network bandwidth
- Supports **VLAN**
 - IEEE 802.1Q tagged VLAN
 - Provider Bridging (VLAN Q-in-Q) support (IEEE 802.1ad)
 - Protocol VLAN
 - Voice VLAN
 - Private VLAN
 - Management VLAN
 - GVRP
- Supports **Spanning Tree Protocol**
 - STP (Spanning Tree Protocol)
 - RSTP (Rapid Spanning Tree Protocol)
 - MSTP (Multiple Spanning Tree Protocol)
 - STP BPDU Guard, BPDU Filtering and BPDU Forwarding
- Supports **Link Aggregation**
 - IEEE 802.3ad Link Aggregation Control Protocol (LACP)
 - Cisco ether-channel (Static Trunk)
 - Maximum 8 trunk groups, up to 8 ports per trunk group
- Provides port mirror (many-to-1)
- Loop protection to avoid broadcast loops
- Supports ERPS (Ethernet Ring Protection Switching)

Quality of Service

- Ingress/Egress Rate Limit per port bandwidth control
- Storm Control support
 - Broadcast/Unknown-Unicast/Unknown-Multicast
- Traffic classification
 - IEEE 802.1p CoS
 - TOS/DSCP/IP Precedence of IPv4/IPv6 packets
- Strict priority and Weighted Round Robin (WRR) CoS policies

Multicast

- Supports IPv4 IGMP snooping v2 and v3
- Supports IPv6 MLD snooping v1, v2
- IGMP querier mode support
- IGMP snooping port filtering
- MLD snooping port filtering

Security

- Authentication
 - IEEE 802.1X Port-based network access authentication
 - Built-in RADIUS client to cooperate with the RADIUS servers
 - DHCP Option 82
 - RADIUS/TACACS+ login user access authentication


Scheduled Power Recycling

The GS-4210-16P4C allows each of the connected PoE IP cameras or PoE wireless access points to reboot at a specified time each week. Therefore, it will reduce the chance of IP camera or AP crash resulting from buffer overflow.



PoE Schedule for Energy Savings

Under the trend of energy savings worldwide and contributing to environmental protection, the GS-4210-16P4C can effectively control the power supply besides its capability of giving high watts power. The “PoE schedule” function helps you to enable or disable PoE power feeding for each PoE port during specified time intervals and it is a powerful function to help SMBs or enterprises save power and money. It also increases security by powering off PDs that should not be in use during non-business hours.

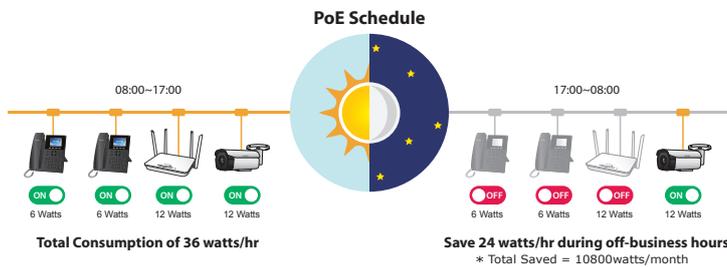


PoE Usage Monitoring

Via the power usage chart in the web management interface, the GS-4210-16P4C enables the administrator to monitor the status of the power usage of the connected PDs in real time. Thus, it greatly enhances the management efficiency of the facilities.

802.3at PoE+ Power and Ethernet Data Transmission Distance Extension

In the “Extend” operation mode, the GS-4210-16P4C operates on a per-port basis at 10Mbps duplex operation but can support 30-watt PoE power output over a distance of up to **250 meters** overcoming the 100m limit on Ethernet UTP cable. With this brand-new feature, the GS-4210-16P4C provides an additional solution for 802.3at/af PoE distance extension, thus saving the cost of Ethernet cable installation.

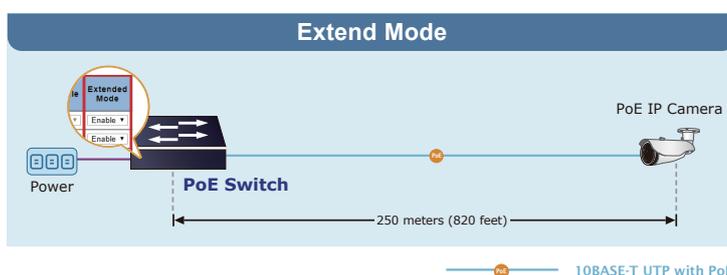


- Access Control List
 - IPv4/IPv6 IP-based ACL
 - IPv4/IPv6 IP-based ACE
 - MAC-based ACL
 - MAC-based ACE
- MAC Security
 - Static MAC
 - MAC Filtering
- Port Security for Source MAC address entries filtering
- DHCP Snooping to filter distrusted DHCP messages
- Dynamic ARP Inspection discards ARP packets with invalid MAC address to IP address binding
- IP Source Guard prevents IP spoofing attacks
- DoS Attack Prevention

Management

- IPv4 and IPv6 dual stack management
- Switch Management Interface
 - Web switch management
 - Console/Telnet Command Line Interface
 - SNMP v1 and v2c switch management
 - SSHv2, TLSv1.2/TLSv1.3 and SNMP v3 secure access
- SNMP Management
 - Four RMON groups (history, statistics, alarms, and events)
 - SNMP trap for interface Link Up and Link Down notification
- User Privilege Levels Control
- Built-in Trivial File Transfer Protocol (TFTP) client
- BOOTP and DHCP for IP address assignment
- System Maintenance
 - Firmware upload/download via HTTP/TFTP
 - Configuration upload / download through Web interface
 - Dual Images
 - Hardware reset button for system reboot or reset to factory default
- SNTP Network Time Protocol
- Network Diagnostic
 - ICMPv6/ICMPv4 Remote Ping
 - Cable Diagnostics
 - SFP-DDM (Digital Diagnostic Monitor)
- Link Layer Discovery Protocol (LLDP) Protocol and LLDP-MED
- Event message logging to remote Syslog server
- SMTP remote alarm
- PLANET Smart Discovery utility automatically finds PLANET devices on the network
- PLANET NMS system and NMSViewerPro/CloudViewerPro/CloudNMS App for deployment management


IPv6/IPv4 Dual Stack Management

Supporting both IPv6 and IPv4 protocols, the GS-4210-16P4C helps the SMBs to step in the IPv6 era with the lowest investment as its network facilities need not be replaced or overhauled if the IPv6 FTTx edge network is set up.

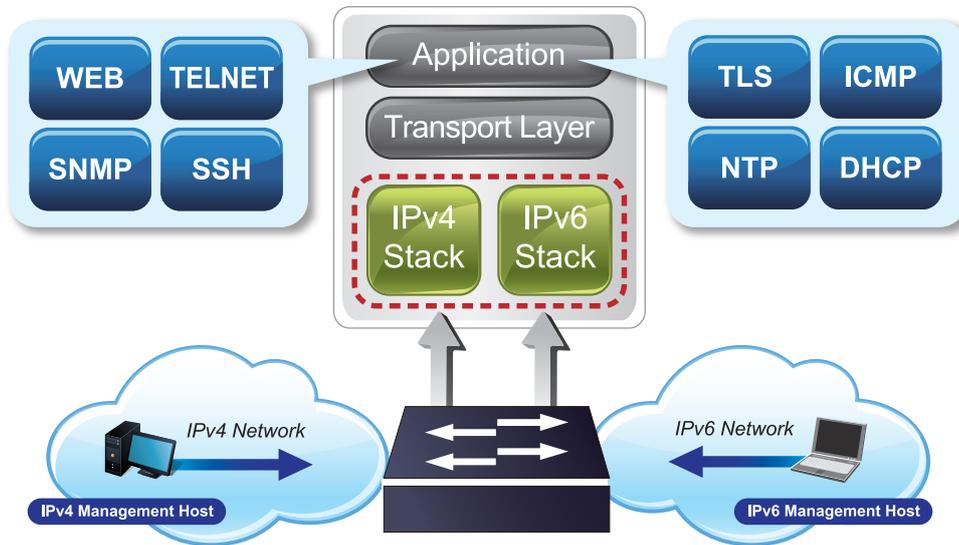

Robust Layer 2 Features

The GS-4210-16P4C can be programmed for advanced switch management functions such as dynamic port link aggregation, 802.1Q VLAN and **Q-in-Q VLAN**, **Multiple Spanning Tree protocol (MSTP)**, loop and **BPDU guard**, **IGMP snooping**, and **MLD snooping**. Via the link aggregation, the GS-4210-16P4C allows the operation of a high-speed trunk to combine with multiple ports such as a 16Gbps fat pipe, and supports fail-over as well. Also, the **Link Layer Discovery Protocol (LLDP)** is the Layer 2 protocol included to help discover basic information about neighboring devices on the local broadcast domain.

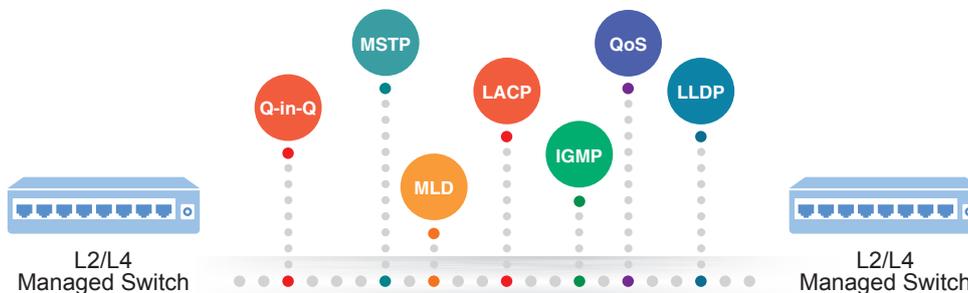

Efficient Traffic Control

The GS-4210-16P4C is loaded with robust QoS features and powerful traffic management to enhance services to business-class data, voice, and video solutions. The functionality includes broadcast / multicast **storm control**, per port **bandwidth control**, IP DSCP QoS priority and remarking. It guarantees the best performance for VoIP and video stream transmission, and empowers the enterprises to take full advantage of the limited network resources.

Powerful Security


PLANET GS-4210-16P4C offers comprehensive **IPv4/IPv6** Layer 2 to Layer 4 **Access Control List (ACL)** for enforcing security to the edge. It can be used to restrict network access by denying packets based on source and destination IP address, TCP/UDP ports or defined typical network applications. Its protection mechanism also comprises **802.1X port-based** user and device authentication, which can be deployed with RADIUS and TACACS+ to ensure the port level security and block illegal users. With the protected port function, communication between edge ports can be prevented to guarantee user privacy. Furthermore, Port security function allows to limit the number of network devices on a given port.

User-friendly and Secure Management

For efficient management, the GS-4210-16P4C is equipped with **web**, **Telnet** and **SNMP** management interfaces.

- With the built-in **Web-based** management interface, the GS-4210-16P4C offers an easy-to-use, platform-independent management and configuration facility.
- For **text-based** management, the switch can be accessed via Telnet and the console port.
- By supporting the standard SNMP, the switch can be managed via any standard management software

Moreover, the GS-4210-16P4C offers secure remote management by supporting **SSHv2**, **TLSv1.2/TLSv1.3** and **SNMP v3** connections which encrypt the packet content at each session.

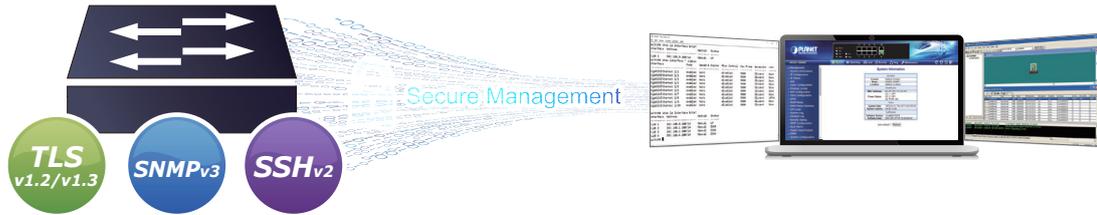

Remote Management Solution

PLANET's **Universal Network Management System (UNI-NMS)** and **NMSViewerPro/CloudViewerPro** app support IT staff by remotely managing all network devices and monitoring PDs' operational statuses. Thus, they're designed for both the enterprises and industries where deployments of PDs can be as remote as possible, without having to go to the actual location once a bug or faulty condition is found. With the UNI-NMS or NMSViewerPro/CloudViewerPro app, all kinds of businesses can now be speedily and efficiently managed from one platform.



PLANET CloudNMS – Cloud-Based Universal Network Management

PLANET’s **CloudNMS** platform and mobile app empower IT staff to remotely manage all network devices and Powered Devices (PDs) in real time. Designed for enterprises and industries, CloudNMS minimizes the need for on-site troubleshooting by providing centralized monitoring, fault detection, and instant alerts.

With **CloudNMS**, businesses can manage diverse network deployments more **efficiently, securely, and intelligently**—all from a single cloud-based platform.




Flexibility and Long-distance Extension Solution

The GS-4210-16P4C provides 4 extra Gigabit TP interfaces supporting 10/100/1000BASE-T RJ45 copper to connect with surveillance network devices such as NVR, Video Streaming Server or NAS to facilitate surveillance management. Or through these **dual-speed fiber SFP slots**, it can also connect with the **100BASE-FX/1000BASE-SX/LX SFP** (Small Form-factor Pluggable) fiber transceiver to uplink to backbone switch and monitoring center in long distance. The distance can be extended from 550 meters to 2 kilometers (multi-mode fiber) and up to above 10/20/40/60/80/120 kilometers (single-mode fiber or WDM fiber). They are well suited for applications within the enterprise data centers and distributions.

Intelligent SFP Diagnosis Mechanism

The GS-4210-16P4C supports **SFP-DDM (Digital Diagnostic Monitor)** function that can easily monitor real-time parameters of the SFP for network administrator, such as optical output power, optical input power, temperature, laser bias current, and transceiver supply voltage.

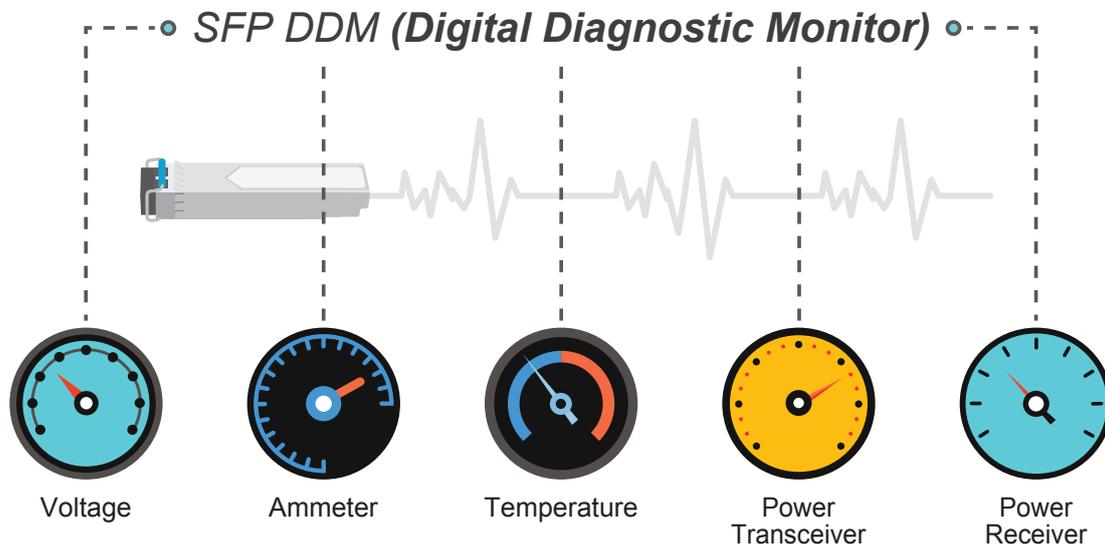


Applications

High Scalability and Best Security for Today's IP Networking and Cyber Security Solution


The GS-4210-16P4C comes with non-blocking design and SFP fiber-optic modules, bringing network infrastructure higher flexibility but lower in cost. Providing sixteen 10/100/1000BASE-T PoE ports and four Gigabit TP/SFP combo ports, the GS-4210-16P4C can easily build a networking security on the cyber security system for the enterprises. For instance, it can work with the router and UTM to perform comprehensive security for today's businesses.

Perfect Combination of 16-Port PoE+ Switch + 25-Ch NVR

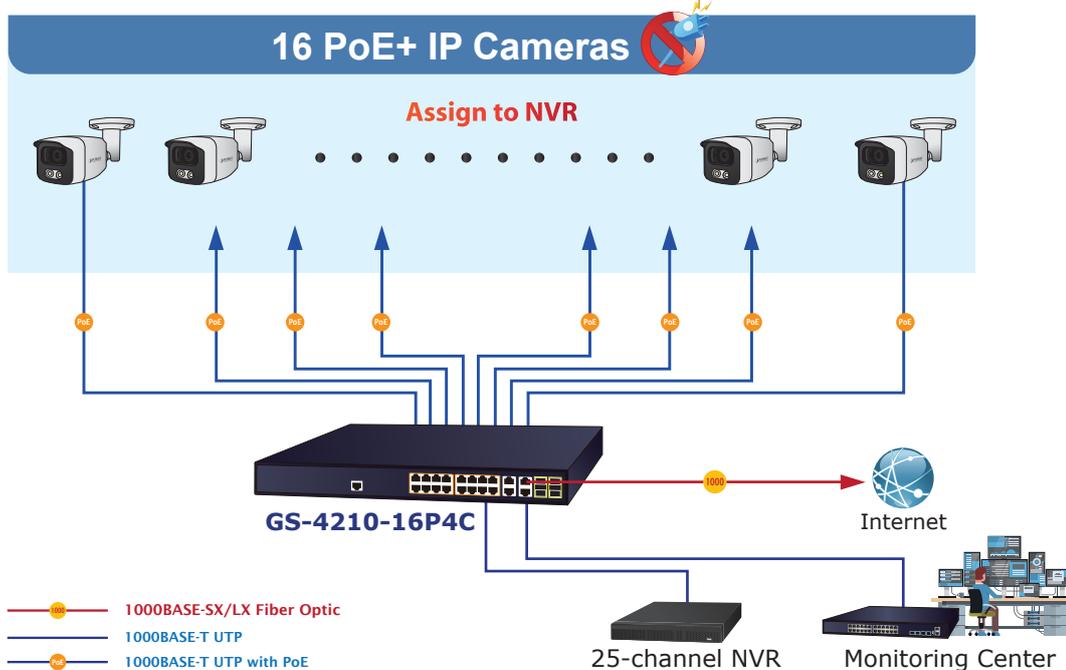

ITU-T G.8032 ERPS with PoE IP Surveillance System for SMBs/Workgroups

The GS-4210-16P4C features strong rapid self-recovery capability to prevent interruptions and external intrusions. It incorporates **ITU-T G.8032 ERPS (Ethernet Ring Protection Switching)** technology into customer's automation network to enhance system reliability and uptime. Applying the IEEE 802.3at Power over Ethernet standard, the GS-4210-16P4C can directly connect with any IEEE 802.3at end-nodes like PTZ (Pan, Tilt & Zoom) network cameras and speed dome cameras. The GS-4210-16P4C can easily build a power that can centrally control a wireless AP/IP camera/VoIP system for SMBs and workgroups in the enterprises with high availability network infrastructure.

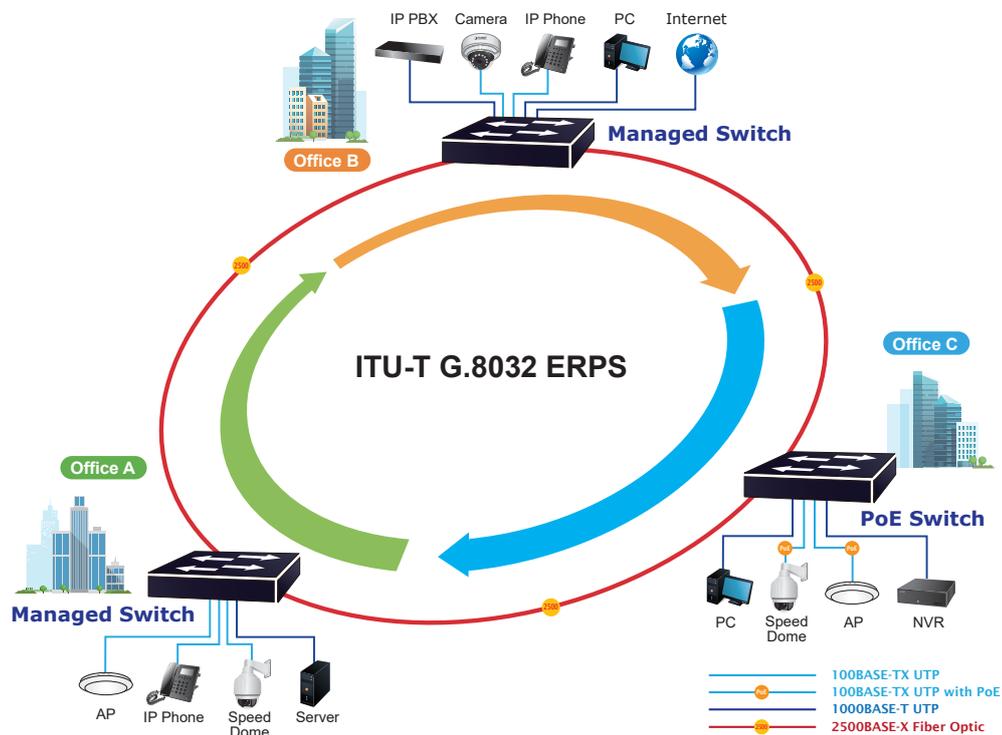


Specifications

Product	GS-4210-16P4C
Hardware Specifications	
Hardware Version	4
Copper Ports	20 x 10/100/1000BASE-T RJ45 Auto-MDI/MDI-X ports
PoE Injector Port	16 ports with 802.3at/af PoE injector function with Port-1 to Port-16
SFP Slots	4 x 100/1000BASE-X SFP interfaces with Port-17 to Port-20 Supports 100/1000Mbps dual mode and DDM
Console	1 x RS-232-to-RJ45 serial port (115200, 8, N, 1)
Reset Button	< 5 sec: System reboot > 5 sec: Factory default
Fan	2 fans
Dimensions (W x D x H)	440 x 207 x 44 mm, 19-inch, 1U height
Weight	2.4kg
ESD Protection	±8KV air gap discharge ±6KV contact discharge
Enclosure	Metal
Power Requirements	100~240V AC, 50/60Hz, 4A (max.)
Power Consumption/Dissipation	Max. 14 watts / 47.7 BTU (Power on without any connection) Max. 278 watts / 948 BTU (Full Loading)
LEDLED	<p>System: PWR x 1 (Green) SYS x 1 (Green)</p> <p>Per PoE Port (Port 1 to Port 16): 1000 LNK/ACT (Green), 10/100 LNK/ACT x1 (Amber), PoE-in-use x 1 (Amber)</p> <p>Per Gigabit RJ45 Port (Port 17 to Port 20): 1000 LNK/ACT (Green) & 10/100 LNK/ACT x 1 (Amber)</p> <p>Per Gigabit SFP Port (Port 17 to Port 20): 1000 LNK/ACT (Green) & 100 LNK/ACT x1 (Amber)</p>
Switching	
Switch Architecture	Store-and-Forward
Switch Fabric	40Gbps/non-blocking
Switch Throughput@64Bytes	29.76Mpps
Address Table	16K entries
Shared Data Buffer	4.1 megabits
Flow Control	IEEE 802.3x pause frame for full duplex Back pressure for half duplex
Jumbo Frame	12K bytes
Power over Ethernet	
PoE Standard	IEEE 802.3af/802.3at PoE/PSE
PoE Power Supply Type	End-span
PoE Power Output	Per Port 54V DC, 300mA. Max. 15.4 watts (IEEE 802.3af) Per Port 54V DC, 600mA. Max. 30 watts (IEEE 802.3at)
Power Pin Assignment	1/2(+), 3/6(-)
PoE Power Budget	240 watts (max.)
Number of 802.3af PDs	15 units
Number of 802.3at PDs	8 units
PoE Management	PD Alive Check Scheduled Power Recycling PoE Schedule PoE Usage Monitoring PoE Extension
Layer 2 Functions	
Port Mirroring	TX/RX/both Many-to-1 monitor Up to 4 sessions
VLAN	IEEE 802.1Q tagged-based VLAN IEEE 802.1ad Q-in-Q tunneling (VLAN stacking) Voice VLAN Protocol VLAN Private VLAN (Protected port) GVRP Management VLAN Up to 256 VLAN groups, out of 4094 VLAN IDs

Link Aggregation	IEEE 802.3ad LACP and static trunk Supports 8 groups of 8-port trunk
Spanning Tree Protocol	STP, IEEE 802.1D Spanning Tree Protocol RSTP, IEEE 802.1w Rapid Spanning Tree Protocol MSTP, IEEE 802.1s Multiple Spanning Tree Protocol STP BPDU Guard, BPDU Filtering and BPDU Forwarding
IGMP Snooping	IPv4 IGMP (v2/v3) snooping IGMP querier Up to 256 multicast groups
MLD Snooping	IPv6 MLD (v1/v2) snooping Up to 256 multicast groups
QoS	8 mapping IDs to 8 level priority queues - Port number - 802.1p priority - DSCP/IP precedence of IPv4/IPv6 packets Traffic classification based, strict priority and WRR Ingress/Egress Rate Limit per port bandwidth control
Ring	Supports ERPS, and complies with ITU-T G.8032 Recovery time < 450ms
Security Functions	
Access Control List	IPv4/IPv6 IP-based ACL/MAC-based ACL IPv4/IPv6 IP-based ACE/MAC-based ACE Max. 256 ACL entries
Port Security	IEEE 802.1X – Port-based authentication Built-in RADIUS client to co-operate with RADIUS server RADIUS/TACACS+ user access authentication
MAC Security	IP-MAC port binding MAC filter Static MAC address, max. 256 static MAC entries
	DHCP Snooping and DHCP Option82 STP BPDU guard, BPDU filtering and BPDU forwarding DoS attack prevention ARP inspection IP source guard
Management Functions	
Basic Management Interfaces	RS232 to RJ45 Console Web browser Telnet SNMP v1, v2c
Secure Management Interfaces	SSHv2, TLS v1.2/TLSv1.3, SNMP v3
System Management	Firmware upgrade by HTTP/TFTP protocol through Ethernet network LLDP protocol SNTP PLANET Smart Discovery Utility PLANET NMS system PLANET NMSViewerPro/CloudViewerPro/CloudNMS
Event Management	Remote/Local Syslog System log SMTP remote alarm
SNMP MIBs	RFC 1213 MIB-II RFC 1215 Generic Traps RFC 1493 Bridge MIB RFC 2737 Entity MIB (Version 2) RFC 2819 RMON (1, 2, 3, 9) RFC 3635 Ethernet-like MIB LLDP MIB PLANET-Aggr-MIB PLANET-DDMI-MIB PLANET-Firmware-MIB PLANET-GVRP-MIB PLANET-LACP-MIB PLANET-SYSUTIL-MIB

Standards Conformance		
Regulatory Compliance	FCC Part 15 Class A, CE	
Standards Compliance	IEEE 802.3 10BASE-T IEEE 802.3u 100BASE-TX/100BASE-FX IEEE 802.3ab Gigabit 1000BASE-T IEEE 802.3z Gigabit SX/LX IEEE 802.3x flow control and back pressure IEEE 802.3ad port trunk with LACP IEEE 802.1D Spanning Tree protocol IEEE 802.1w Rapid Spanning Tree protocol IEEE 802.1s Multiple Spanning Tree protocol IEEE 802.1p Class of Service IEEE 802.1Q VLAN tagging IEEE 802.1x Port Authentication Network Control IEEE 802.1ab LLDP IEEE 802.3af Power over Ethernet	IEEE 802.3at Power over Ethernet Plus RFC 768 UDP RFC 783 TFTP RFC 791 IP RFC 792 ICMP RFC 793 TCP RFC 2068 HTTP RFC 1112 IGMP version 1 RFC 2236 IGMP version 2 RFC 3376 IGMP version 3 RFC 2710 MLD version 1 RFC 3810 MLD version 2 ITU-T G.8032 ERPS Ring
Environment		
Operating	Temperature: 0 ~ 50 degrees C Relative Humidity: 5 ~ 95% (non-condensing)	
Storage	Temperature: -20 ~ 70 degrees C Relative Humidity: 5 ~ 95% (non-condensing)	

Dimensions

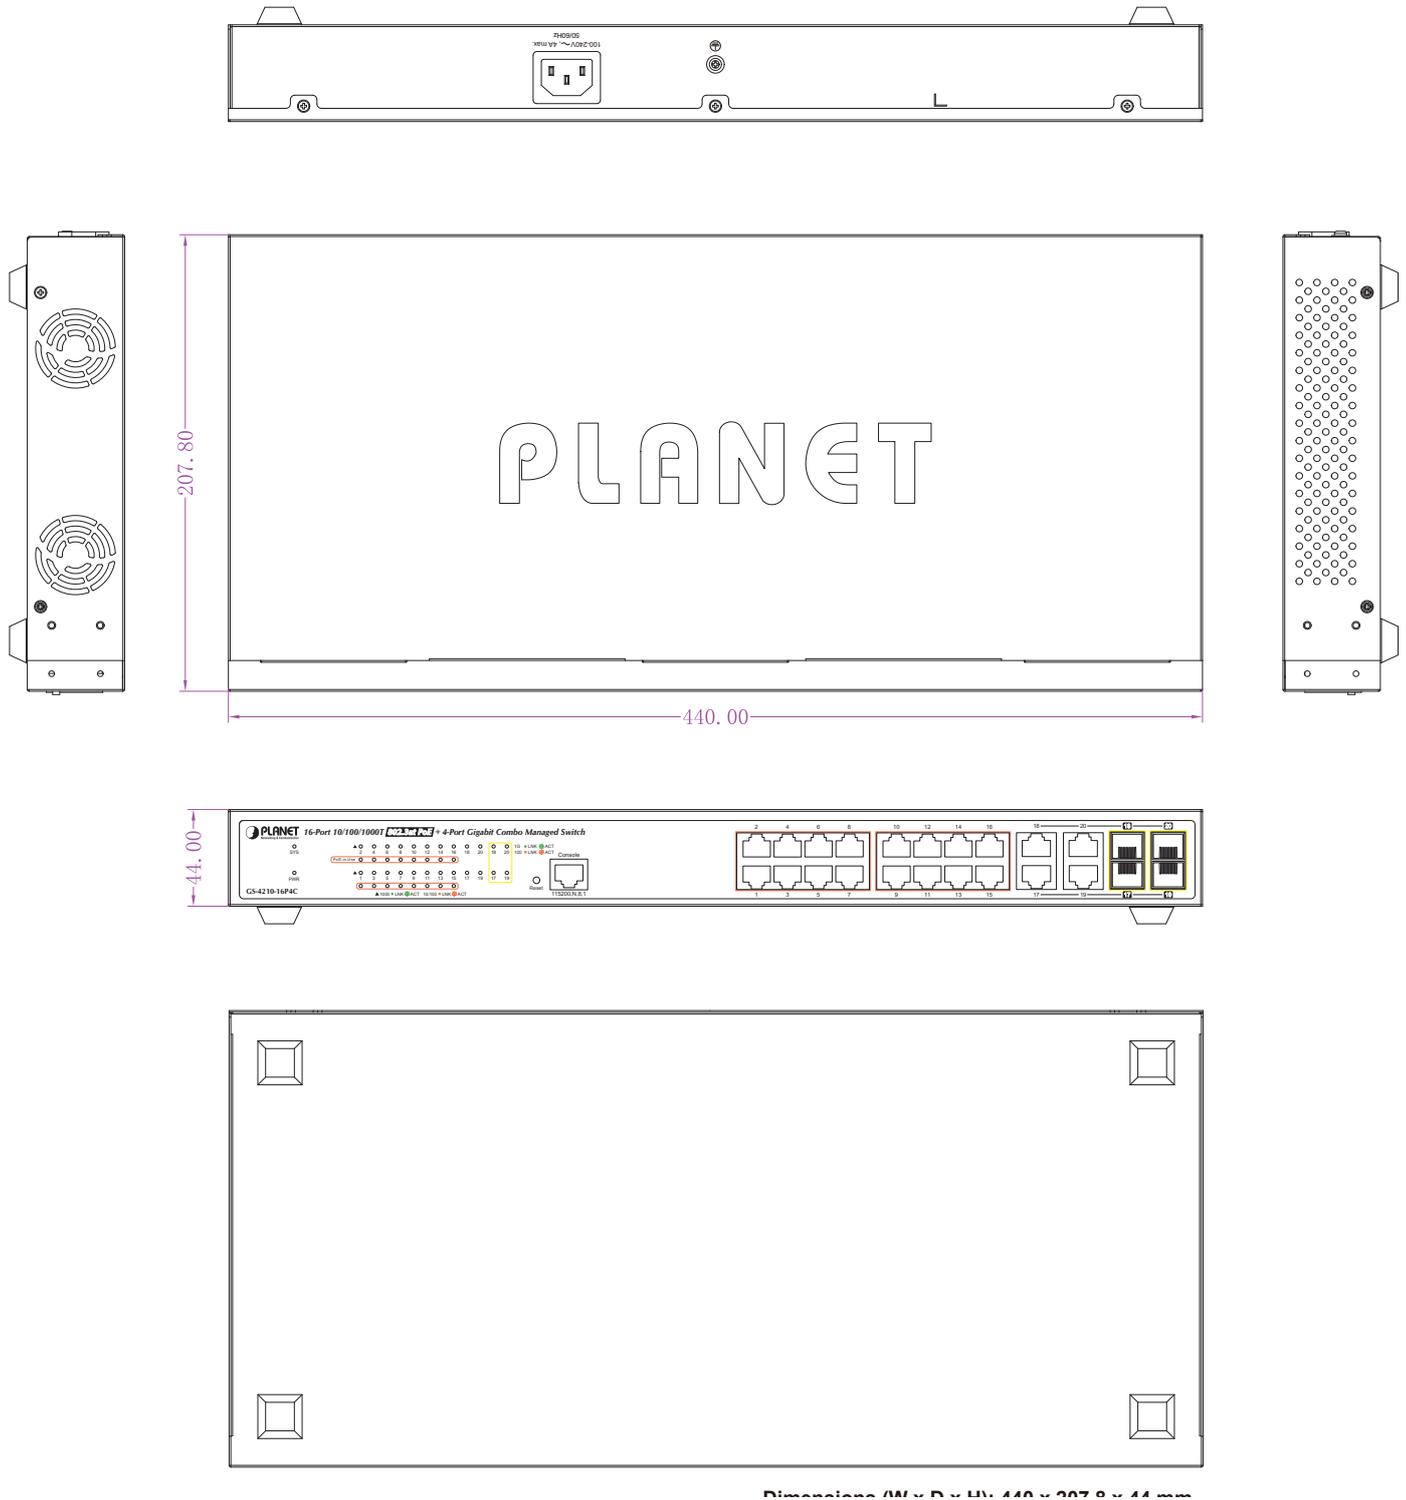

Ordering Information

GS-4210-16P4C

16-Port 10/100/1000T 802.3at PoE + 4-Port Gigabit TP/SFP Combo Managed Switch

Related Products

GS-4210-16P2S	16-Port 10/100/1000T 802.3at PoE +2-Port 1G/2.5G SFP Managed Ethernet Switch
GS-4210-24P2S	24-Port 10/100/1000T 802.3at PoE +2-Port 1G/2.5G SFP Managed Ethernet Switch
GS-4210-24P4C	24-Port 10/100/1000T 802.3at PoE + 4-Port Gigabit TP/SFP combo Managed Ethernet Switch
GS-4210-24PL4C	24-Port 10/100/1000T 802.3at PoE + 4-Port Gigabit TP/SFP combo Managed Ethernet Switch

Available 100Mbps Modules

Fast Ethernet Transceiver (100BASE-X SFP)

Model	DDM	Speed (Mbps)	Connector Interface	Fiber Mode	Distance	Wavelength (nm)	Operating Temp.
MFB-FX	--	100	LC	Multi Mode	2km	1310nm	0 ~ 60°C
MFB-F20	--	100	LC	Single Mode	20km	1310nm	0 ~ 60°C
MFB-F40	--	100	LC	Single Mode	40km	1310nm	0 ~ 60°C
MFB-F60	--	100	LC	Single Mode	60km	1310nm	0 ~ 60°C
MFB-F120	--	100	LC	Single Mode	120km	1550nm	0 ~ 60°C

Fast Ethernet Transceiver (100BASE-BX, Single Fiber Bi-directional SFP)

Model	DDM	Speed (Mbps)	Connector Interface	Fiber Mode	Distance	Wavelength (TX)	Wavelength (RX)	Operating Temp.
MFB-FA20	--	100	WDM(LC)	Single Mode	20km	1310nm	1550nm	0 ~ 60°C
MFB-FB20	--	100	WDM(LC)	Single Mode	20km	1550nm	1310nm	0 ~ 60°C

Available 1000Mbps Modules

Gigabit Ethernet Transceiver (1000BASE-X SFP)

Model	DDM	Speed (Mbps)	Connector Interface	Fiber Mode	Distance	Wavelength (nm)	Operating Temp.
MGB-GT	--	1000	Copper	--	100m	--	0 ~ 60°C
MGB-SX(V2)	YES	1000	LC	Multi Mode	550m	850nm	0 ~ 60°C
MGB-SX2(V2)	YES	1000	LC	Multi Mode	2km	1310nm	0 ~ 60°C
MGB-LX(V2)	YES	1000	LC	Single Mode	20km	1310nm	0 ~ 60°C
MGB-L40	YES	1000	LC	Single Mode	40km	1310nm	0 ~ 60°C
MGB-L80	YES	1000	LC	Single Mode	80km	1550nm	0 ~ 60°C
MGB-L120(V2)	YES	1000	LC	Single Mode	120km	1550nm	0 ~ 60°C

Gigabit Ethernet Transceiver (1000BASE-BX, Single Fiber Bi-directional SFP)

Model	DDM	Speed (Mbps)	Connector Interface	Fiber Mode	Distance	Wavelength (TX)	Wavelength (RX)	Operating Temp.
MGB-LA10(V2)	YES	1000	WDM(LC)	Single Mode	10km	1310nm	1550nm	0 ~ 60°C
MGB-LB10(V2)		1000	WDM(LC)	Single Mode	10km	1550nm	1310nm	0 ~ 60°C
MGB-LA20(V2)	YES	1000	WDM(LC)	Single Mode	20km	1310nm	1550nm	0 ~ 60°C
MGB-LB20(V2)		1000	WDM(LC)	Single Mode	20km	1550nm	1310nm	0 ~ 60°C
MGB-LA40(V2)	YES	1000	WDM(LC)	Single Mode	40km	1310nm	1550nm	0 ~ 60°C
MGB-LB40(V2)		1000	WDM(LC)	Single Mode	40km	1550nm	1310nm	0 ~ 60°C
MGB-LA80	YES	1000	WDM(LC)	Single Mode	80km	1490nm	1550nm	0 ~ 60°C
MGB-LB80		1000	WDM(LC)	Single Mode	80km	1550nm	1490nm	0 ~ 60°C