

FnIO M – Series :

M4118

M4118 (8 Channels , Current Output, 4~20mA, 12bit)

Table of Contents

| | |
|---|-------------------|
| Table of Contents..... | 2 |
| History..... | 3 |
| 1.ENVIRONMENT SPECIFICATION..... | 4 |
| 2.M4118 (8 Channels Current Output, 0~20mA, 12Bit)..... | 5 |
| 2.1.M4118 Specification..... | 5 |
| 2.2.M4118 Wiring Diagram..... | 6 |
| 2.3.M4118 LED Indicator..... | 7 |
| 2.3.1.LED Indicator..... | 7 |
| 2.3.2.Channel Status LED..... | 7 |
| 2.3.3.Data value / Current..... | 7 |
| 2.4.Mapping data from the image table..... | 8 |
| 2.5.Parameter Data..... | 9 |

History

| REV. | PAGES | REMARKS | DATE | Editor |
|------|-------|---|------------|--------|
| - | | Preliminary | 2018/6/18 | BS HA |
| 1.00 | | | 2019/03/18 | YM KIM |
| 1.01 | | Image, Torque, Hotswap Function | 2020/04/21 | CW SEO |
| 1.02 | | Vibration specification, Product certification changed | 2020/04/27 | CW SEO |
| 1.03 | 11~15 | Added ATEX certificate | 2020/05/07 | BS HA |
| 1.04 | | Remove Description pages of Hot Swap Function, Use in Hazardous Environments and Caution(Before using the unit) | 2020/12/09 | SJ LIM |

1. ENVIRONMENT SPECIFICATION

| Environmental specification | |
|------------------------------------|---|
| Operating Temperature | -25°C~60°C |
| UL Temperature | -20°C~60°C |
| Storage Temperature | -40°C~85°C |
| Relative Humidity | 5% ~ 90% non-condensing |
| Mounting | DIN rail |
| | |
| General specification | |
| Shock Operating | IEC 60068-2-27 |
| Vibration Resistance | Based on IEC 60068-2-6 DNVGL-CG-0039 : Vibration Class B, 4g |
| Industrial Emissions | EN 61000-6-4/A11 : 2011 |
| Industrial Immunity | EN 61000-6-2 : 2005 |
| Installation Position | Vertical and horizontal installation is available. |
| Product Certifications | CE, UL, FCC, ATEX, DNV |


2. M4118 (8 Channels Current Output, 0~20mA, 12Bit)

2.1. M4118 Specification

| Items | Specification |
|------------------------------|---|
| Output Specification | |
| Outputs per module | 8 Channels single ended |
| Indicators(Logic side) | 8 Green Output status |
| Resolution in Ranges | 12 bits : 4.88uA/Bit |
| Output Range | 0~20mA |
| Data Format | 16bits Integer (2' compliment) |
| Module Error | ±0.1% Full Scale @ 25°C ±0.3% Full Scale @ -25°C, 60°C |
| Load Resistance | <200Ω |
| Dignostic | Field Power Off : Led Blinking Field Power On : Led ON |
| Conversion Time | Max. 250usec / All channel |
| Calibration | Not Required |
| Common Type | 8 Common, Field Power 0V is Common(AGND) |
| General specification | |
| Power dissipation | Max. 30mA @ 5.0Vdc |
| Isolation | I/O to Logic : Photocoupler Isolation Field power : Non-Isolation |
| UL Field Power | Supply voltage : 24Vdc nominal, Class 2 |
| Field Power | Supply voltage : 24Vdc Norminal Voltage range : 18V ~ 28.8Vdc Power dissipation : 130mA @ 24Vdc |
| Single Wire | 0.205mm ² - 1.3mm ² (24-16 AWG) |
| Torque | 0.8Nm(7 lb-in) |
| Weight | 72g |
| Module Size | 12mm x 110mm x 75mm |
| Hot Swap | Possible |
| Environment Condition | Refer to '1. Environment Specification' |

* Class 2, adjacent to voltage rating (30Vmax)

2.2. M4118 Wiring Diagram

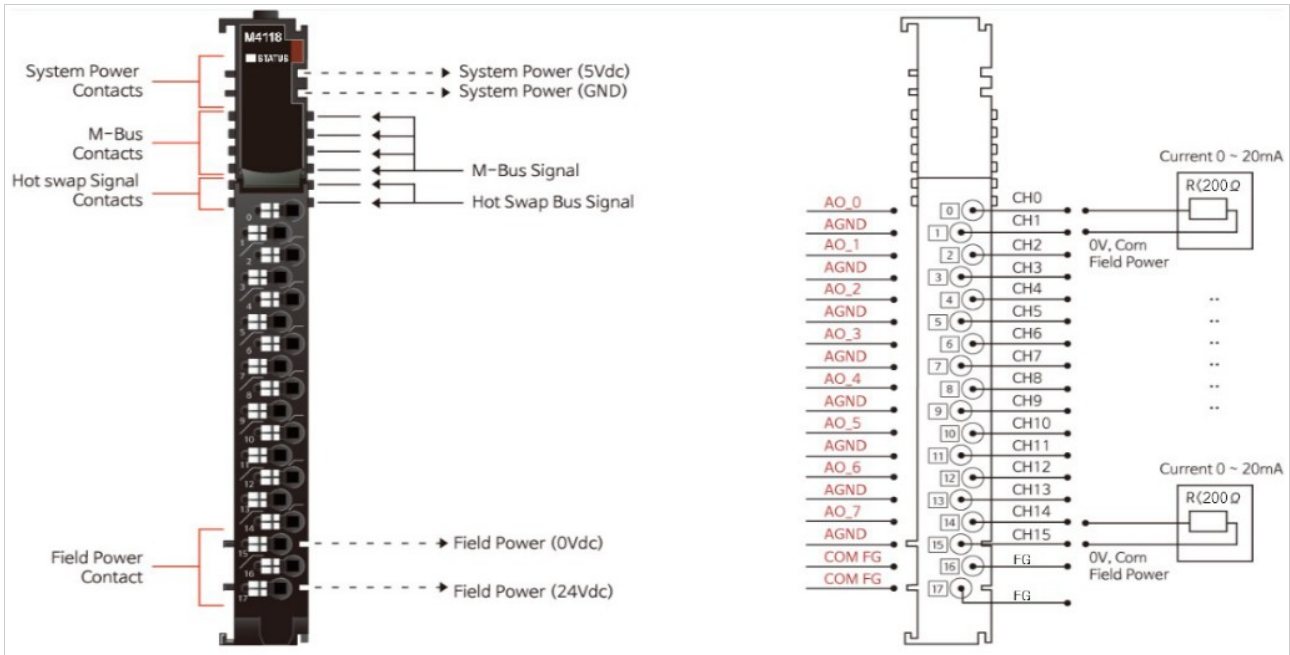

| Pin No. | Signal Description |
|---------|--------------------|
| 0 | Output Channel 0 |
| 1 | Common(AGND) |
| 2 | Output Channel 1 |
| 3 | Common(AGND) |
| 4 | Output Channel 2 |
| 5 | Common(AGND) |
| 6 | Output Channel 3 |
| 7 | Common(AGND) |
| 8 | Output Channel 4 |
| 9 | Common(AGND) |
| 10 | Output Channel 5 |
| 11 | Common(AGND) |
| 12 | Output Channel 6 |
| 13 | Common(AGND) |
| 14 | Output Channel 7 |
| 15 | Common(AGND) |
| 16 | F.G |
| 17 | F.G |

| Series No | Through Air | Over Surface | CTI |
|-----------|-------------|--------------|-------------|
| RTB18C | 1.5mm | 1.5mm | 175≤CTI≤400 |

Spacings : The following minimum spacing in inches (millimeters) shall be maintained between uninsulated live parts of opposite polarity; and between an uninsulated live part and a grounded part including any mounting surface or exposed metal part.

2.3. M4118 LED Indicator

2.3.1. LED Indicator




| LED No. | LED Function / Description | LED Color |
|---------|----------------------------|-----------|
| STATUS | M-bus Status | Green |

2.3.2. Channel Status LED

| Status | LED | To indicate |
|-------------------|--------------------------------------|-----------------------------|
| M-Bus Status | Off Green | Disconnection Connection |
| Field Power Error | All Channel Repeat the Green and Off | Field power is unconnected. |

2.3.3. Data value / Current


| Current | 0.0mA | 5.0mA | 10.0mA | 20.0mA |
|-----------|-------|-------|--------|--------|
| Data(Hex) | H0000 | H03FF | H07FF | H0FFF |

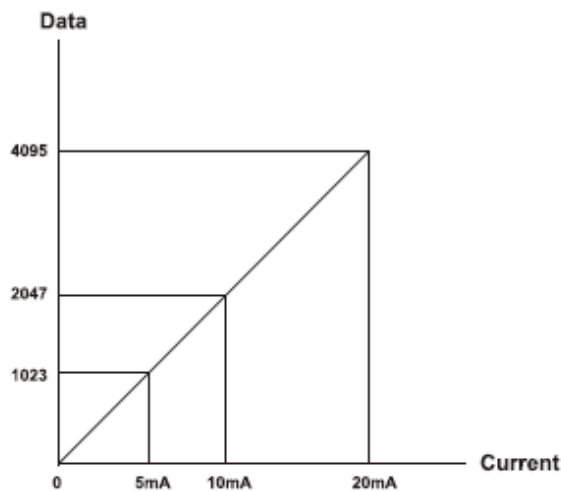

2.4. Mapping data from the image table

- **Output Image Value**

| Bit No | Bit7 | Bit6 | Bit5 | Bit4 | Bit3 | Bit2 | Bit1 | Bit0 |
|---------|-----------------------------|------|------|------|------|------|------|------|
| Byte 0 | Analog Output Ch0 Low byte | | | | | | | |
| Byte 1 | Analog Output Ch0 High byte | | | | | | | |
| Byte 2 | Analog Output Ch1 Low byte | | | | | | | |
| Byte 3 | Analog Output Ch1 High byte | | | | | | | |
| Byte 4 | Analog Output Ch2 Low byte | | | | | | | |
| Byte 5 | Analog Output Ch2 High byte | | | | | | | |
| Byte 6 | Analog Output Ch3 Low byte | | | | | | | |
| Byte 7 | Analog Output Ch3 High byte | | | | | | | |
| Byte 8 | Analog Output Ch4 Low byte | | | | | | | |
| Byte 9 | Analog Output Ch4 High byte | | | | | | | |
| Byte 10 | Analog Output Ch5 Low byte | | | | | | | |
| Byte 11 | Analog Output Ch5 High byte | | | | | | | |
| Byte 12 | Analog Output Ch6 Low byte | | | | | | | |
| Byte 13 | Analog Output Ch6 High byte | | | | | | | |
| Byte 14 | Analog Output Ch7 Low byte | | | | | | | |
| Byte 15 | Analog Output Ch7 High byte | | | | | | | |



- **Output Module Data -16byte Output Data**

| |
|-------------------|
| Analog Output Ch0 |
| Analog Output Ch1 |
| Analog Output Ch2 |
| Analog Output Ch3 |
| Analog Output Ch4 |
| Analog Output Ch5 |
| Analog Output Ch6 |
| Analog Output Ch7 |

2.5. Parameter Data

- Valid Parameter length: 4 Bytes
- Parameter Data

| Bit No | Bit7 | Bit6 | Bit5 | Bit4 | Bit3 | Bit2 | Bit1 | Bit0 |
|--------------|---|------|----------------------------|------|----------------------------|------|----------------------------|------|
| Byte0 | Fault Action for channel 3 | | Fault Action for channel 2 | | Fault Action for channel 1 | | Fault Action for channel 0 | |
| | 00: Fault Value 01: Hold last state 10: Low Limit 11:High Limit | | | | | | | |
| Byte1 | Fault Action for channel 7 | | Fault Action for channel 6 | | Fault Action for channel 5 | | Fault Action for channel 4 | |
| Byte2 | Fault Value Low Byte | | | | | | | |
| Byte3 | Not used | | | | Fault Value High Byte | | | |