

FnIO M – Series :

M2774

M2774(4 Points, Form C, Relay Terminal, 24Vdc/2A, 240Vac/2A)

Table of Contents

Table of Contents.....	2
History.....	3
1.Environment Specification.....	4
2.M2774 (4 Points, Relay Output Terminal, 24Vdc/2A, 240Vac/2A).....	5
2.1.M2774 Specification.....	5
2.2.M2774 Wiring Diagram.....	6
2.3.M2774 LED Indicator.....	7
2.3.1.LED Indicator.....	7
2.3.2.Channel Status LED.....	7
2.4.Mapping Data into the Image Table.....	8
2.5.Parameter Data.....	8

History

REV.	PAGES	REMARKS	DATE	Editor
Preliminary		Preliminary	Oct. 14, 2019	BS, HA
1.01		Image, UL Spec, Torque, Hotswap Function	2020/04/21	CW SEO
1.02		Vibration specification, Product certification changed	2020/04/27	CW SEO
1.03	10~14	Added ATEX certificate	2020/05/07	bs, HA
1.04		Remove Description pages of Hot Swap Function, Use in Hazardous Environments and Caution(Before using the unit)	2020/12/08	SJ LIM
1.05	4	Environment Specification Update	2021/11/16	EC KIM
1.06	4	Certificate Update	2023/06/05	CW SEO

1. Environment Specification

Environmental specification	
Operating Temperature	-25°C~60°C
UL Temperature	-25°C~60°C
Storage Temperature	-40°C~85°C
Relative Humidity	5% ~ 90% non-condensing
Mounting	DIN rail
General specification	
Shock Operating	IEC 60068-2-27
Vibration Resistance	IEC 60068-2-6, 4g
Industrial Emissions	EN 61000-6-4/A11 : 2011
Industrial Immunity	EN 61000-6-2 : 2019
Installation Position	Vertical and horizontal installation is available.
Protection type	IP20
Product Certifications	UL, CE, UKCA, ABS, BV, CCS, DNV, KR, LR


2. M2774 (4 Points, Relay Output Terminal, 24Vdc/2A, 240Vac/2A)

2.1. M2774 Specification

Items	Specification
Output specification	
Output per module	4 Points, Bi-directional
Indicators (Logic side)	4 Green output state
Relay Type	Form C, Single Pole double Throw (SPDT)
Output Voltage Range	Max. 24Vdc @ 2.0A resistive Max. 240Vac @ 2.0A resistive
Output Current Rating	Max. 2.0A per channels
Output Delay Time (resistive load) - Operate Time (OFF to ON)	Max. 8ms @ 24Vdc Max. 8ms @ 240Vac
- Release Time (ON to OFF)	Max. 8ms @ 24Vdc Max. 14ms @ 240Vac
Expected Contact Life	Min. 5M Cycles (Resistive)
Frequency Range (Vac)	47Hz ~ 63Hz
Max. On-State Voltage Drop*	0.5V @ 2.0A, Resistive Load, 24Vdc
Commons Type	1 Commons per 1 points (Total 4 Commons)
General Specification	
Power dissipation	35mA maximum @ 5.0Vdc
Isolation	I/O to Logic : Photocoupler isolation
UL Field Power	Supply voltage : 24Vdc nominal, Class 2
Field Power	Supply voltage : 24Vdc Nominal (AC Power Not used) Voltage range : 22V ~ 26Vdc Power dissipation: 30mA maximum @ 24Vdc
Single Wire	0.205mm ² - 1.3mm ² (24-16 AWG)
Torque	0.8Nm(7 lb-in)
Weight	84g
Module Size	12mm x 110mm x 75mm
Hot Swap	Possible
Environment Condition	Refer to '1. Environment Specification'

* Voltage Drop specification is dependent on the cable length due to the high Load.

2.2. M2774 Wiring Diagram

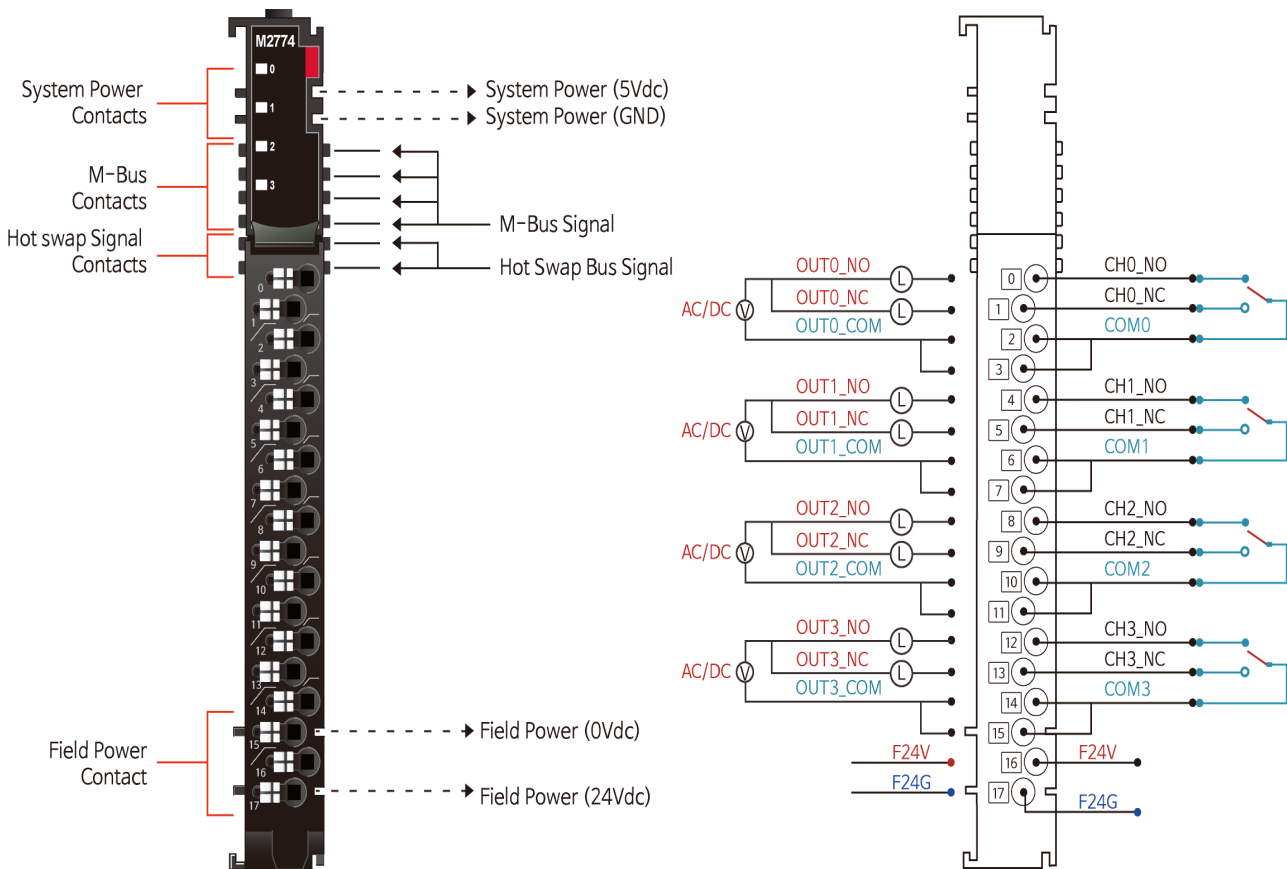

Pin No.	Signal Description
0	Output Channel 0 NO
1	Output Channel 0 NC
2	Output Channel 0 COM0
3	Output Channel 0 COM0
4	Output Channel 1 NO
5	Output Channel 1 NC
6	Output Channel 1 COM1
7	Output Channel 1 COM1
8	Output Channel 2 NO
9	Output Channel 2 NC
10	Output Channel 2 COM2
11	Output Channel 2 COM2
12	Output Channel 3 NO
13	Output Channel 3 NC
14	Output Channel 3 COM3
15	Output Channel 3 COM3
16	Field Power 24Vdc
17	Field Power 0Vdc

Series No	Through Air	Over Surface	CTI
RTB18C	1.5mm	1.5mm	175≤CTI≤400

Spacings : The following minimum spacing in inches (millimeters) shall be maintained between uninsulated live parts of opposite polarity; and between an uninsulated live part and a grounded part including any mounting surface or exposed metal part.

2.3. M2774 LED Indicator

2.3.1. LED Indicator



LED No.	LED Function / Description	LED Color
0	Output Channel Status 0	Green
1	Output Channel Status 1	Green
2	Output Channel Status 2	Green
3	Output Channel Status 3	Green


2.3.2. Channel Status LED

Status	LED	To indicate
Not Signal	Off	Normal Operation
On Signal	Green	Normal Operation

2.4. Mapping Data into the Image Table

- **Output Image Value**

Bit No	Bit7	Bit6	Bit5	Bit4	Bit3	Bit2	Bit1	Bit0
Byte0	Reserved				D3	D2	D1	D0



- **Output Module Data**

D3	D2	D1	D0
----	----	----	----

2.5. Parameter Data

- Valid Parameter length : 2 Bytes
- Parameter Data

Bit No	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
Byte 0	Reserved				Fault Action (ch0~ch3) 0: Fault value, 1:Hold last state			
Byte 1	Reserved				Fault value (ch0~ch3) 0:Off, 1:On			